

APEX-108H-N410-N430M10

N-TOPCon Technology

22.02%

Maximum Module Efficiency

430W

Maximum Power Output

Power Shorting Tolerance:0-3W

1724×1134×30mm

Module Dimensions

IEC 61215 / IEC 61730

Fire safety class:Class C according to UL790


ISO 9001 :Quality Management System

ISO 14001 :Environment Management



Industry Leading Linear Power Warranty

12-year Warranty for Materials and Processing, 30-year Warranty for Extra Linear Power Output

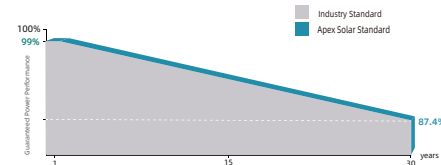

12 Process Warranty

30 Power Warranty

APEX-108H-N410-N430M10

ELECTRICAL PARAMETERS AT STC

Rated Maximum Power(Pmax) [W]	410	415	420	425	430
Maximum Power Voltage(Vmp) [V]	31.13	31.32	31.51	31.70	31.88
Maximum Power Current(Imp) [A]	13.17	13.25	13.33	13.41	13.49
Open Circuit Voltage(Voc) [V]	37.73	37.92	38.11	38.30	38.49
Short Circuit Current(Isc) [A]	13.91	13.99	14.07	14.15	14.23
Module Efficiency [%]	21.00	21.25	21.51	21.76	22.02

STC: Irradiance 1000 W/m² module temperature 25°C AM=1.5

ELECTRICAL PARAMETERS AT NMOT

Rated Maximum Power(Pmax)[W]	308	312	316	320	323
Maximum Power Voltage(Vmp) [V]	29.06	29.21	29.34	29.50	29.63
Maximum Power Current(Imp) [A]	10.61	10.68	10.76	10.83	10.91
Open Circuit Voltage(Voc) [V]	35.84	36.02	36.20	36.38	36.56
Short Circuit Current(Isc) [A]	11.23	11.29	11.36	11.42	11.49

NMOT: Irradiance 800 W/m² ambient temperature 20°C wind speed: 1m/s

MECHANICAL SPECIFICATION

Cell Type	N-Type Monocrystalline
Cell Dimensions	182×182mm
Cell Arrangement	108(2×54)
Weight	22kg(±3%)
Module Dimensions	1724×1134×30mm
Cable	4.0 mm ² positive/negative:300mm(11.8inches),length Can be customized
Front Glass	3.2 mm high transmittance,AR coating tempered glass
Frame	Anodized aluminium alloy
Junction Box	Protection class IP68
Type of Connector	PV-XT101.1 (Suzhou Xtong Photovoltage Technology Co., Ltd)
Mechanical Load	Front side 5400Pa/Rear side 2400Pa


OPERATING CONDITIONS

Maximum System Voltage (V)	1000/1500VDC (IEC)
Pmax Temperature Coefficient	-0.30%/°C
Voc Temperature Coefficient	-0.25%/°C
ISC Temperature Coefficient	0.046%/°C
Nominal Operating Cell Temperature	45±2°C
Operating Temperature	-40°C~+85°C
Maximum Series Fuse	25A


PPACKING CONFIGURATION

Quantity/Pallet	36pcs/pallet
Quantity/Container	936pcs/40HQ

Module Dimension(mm)

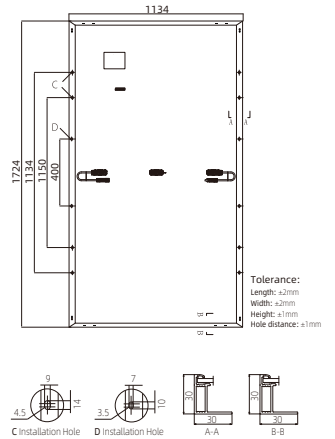

Current-Voltage Curve (430W)



Power-Voltage Curve (430W)

